

AD 713878

FOREIGN TECHNOLOGY DIVISION



COMPOSITE COOLED ROTOR BLADE

by

N. Ya. Litvinov and V. S. Lyubinetzkiy

DDC
RECEIVED
NOV 3 1970
RUSC




Reproduced by
NATIONAL TECHNICAL
INFORMATION SERVICE
Springfield, Va. 22151

Distribution of this document is unlimited. It may be released to the Clearinghouse, Department of Commerce, for sale to the general public.



DISCLAIMER NOTICE

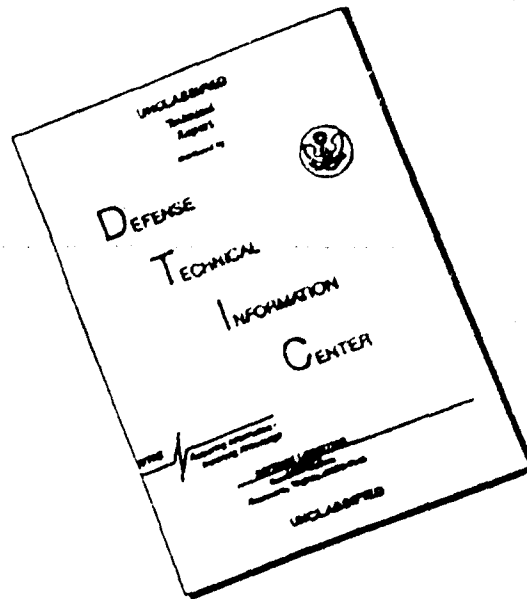

THIS DOCUMENT IS BEST
QUALITY AVAILABLE. THE COPY
FURNISHED TO DTIC CONTAINED
A SIGNIFICANT NUMBER OF
PAGES WHICH DO NOT
REPRODUCE LEGIBLY.

FTD-HT-23-515-70

EDITED TRANSLATION

COMPOSITE COOLED ROTOR BLADE

By: N. Ya. Litvinov and V. S. Lyubinetskiy

English pages: 2

Source: USSR Patent No. 196484 (Appl. No.
1010282/24-6, April 26, 1965),
pp. 1-2.

Translated by: M. Olacchia/TDBRS-3

UR/0000-69-000-000

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION
FOREIGN TECHNOLOGY DIVISION
WP-APB, OHIO.

FTD-HT-23-515-70

Date 21 Sept. 1970

COMPOSITE COOLED ROTOR BLADE

N. Ya. Litvinov and V. S. Lyubinetskiy

Composite cooled rotor blades of, for example, gas or steam turbines, consisting of a detachable tool with a coolant chamber and blading with profiled ducts, are known.

Unlike the above blade the blade described here consists of hollow cooled crosspieces set at different heights right up to the shroud web, forming a frame construction during assembly. This blade design increases static and vibration strength as well as operational reliability.

The figure shows the blade in cross section.

Blade foils 1 and 2 are attached to moveable joint 3 and joined to each other by hollow crosspiece 4, which is in the flow.


The crosspieces are located at different heights right up to the shroud web.

The joint contains chamber 5 for the coolant, which is joined with profiled canals 6 of the blade foils and the crosspiece.

Object of the Invention

The composite cooled rotor blade of, for example, a gas or steam

turbine, consists of a detachable root with a chamber for a coolant and blade foils with profiled ducts. This blade is distinguished by the fact that in order to improve its static and vibrational strength and operational reliability, it is equipped with hollow cooled crosspieces, located at different heights right up to the shroud web and forming a frame construction upon assembly.

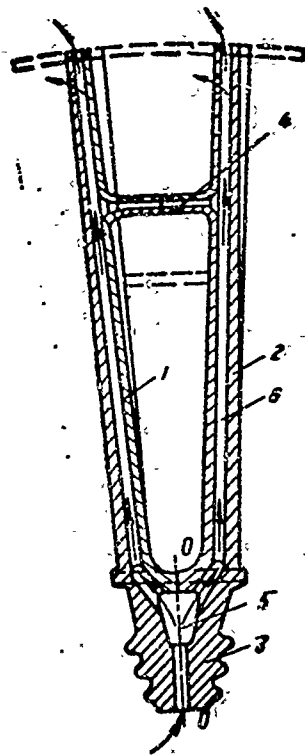

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author)		2a. REPORT SECURITY CLASSIFICATION
Foreign Technology Division Air Force Systems Command U. S. Air Force		UNCLASSIFIED
2. REPORT TITLE		3b. GROUP
COMPOSITE COOLED ROTOR BLADE		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)		
Translation		
5. AUTHOR(S) (First name, middle initial, last name)		
Litvinov, N. Ya. and Lyubinetskiy, V. S.		
6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
26 April 1965	2	
8a. CONTRACT OR GRANT NO.	8b. ORIGINATOR'S REPORT NUMBER(S)	
b. PROJECT NO. 3066	FTD-HT-23-515-70	
c.	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.		
10. DISTRIBUTION STATEMENT		
Distribution of this document is unlimited. It may be released to the Clearinghouse, Department of Commerce, for sale to the general public.		
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY
		Foreign Technology Division Wright-Patterson AFB, Ohio
13. ABSTRACT		
<p>An Author Certificate has been issued for a composite cooled blade, for example for a gas or steam turbine rotor, consisting of a detachable root with a coolant chamber and a blade section with profiled ducts. To increase static and vibration strength and operational reliability, the blade consists of hollow cooled cross pieces, located at different heights, thereby forming the frame structure during assembly. [Patent Abstract] [AP9011875]</p>		

DD FORM 1473

NOV 65

UNCLASSIFIED
Security Classification

UNCLASSIFIED

Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Turbine Blade Engine Turbine System Rotor Blade						

UNCLASSIFIED

Security Classification